




NWP500 Series Heat Pump Water Heaters Specification Sheet

- Certified to **UL 60335-1, 60335-2-40, 174** and **CSA C22.2 #60335-1, 60335-2-40, and 110** standards
- Available in 3 model sizes - **50 gal / 65 gal / 80-gal**
- Features a **stainless steel tank** and **aluminum coils** for improved durability.
- **Top** and **side** connections provide flexibility during installation
- Designed to meet **NEEA AWHs Tier 4** requirements
- Easy-to-use control panel with **multi-line LED** display
- **Demand Response-Ready** with built-in EcoPort™ (CTA-2045 module included)
- California **JA13** compliant with Time-Of-Use scheduling feature available
- Quiet operation - less than **45dBA**
- Built-in Wi-Fi powered by **NaviLink®** with over-the-air software updates
- **5 Operating Modes** for maximum performance efficiency:
Energy Saver, Heat Pump, High Demand, Electric and Vacation



Specifications

Item	Model Series	NWP500-50	NWP500-65	NWP500-80
	Model No.	NWP500S050AUMB	NWP500S065AUMB	NWP500S080AUMB
Capacity & Efficiency				
Nominal capacity (gallons)		50	65	80
Rated storage volume (gallons)		45.2	63.2	76.1
UEF (Uniform Energy Factor)		3.85	4.03	4.05
First hour rating (gallons)		65	80	85
AHRI number		217191097	217191098	217191099
Product General Data				
Installation location		Indoor		
Water pressure		15–150 psi		
	Cold water inlet			
	Hot water outlet			

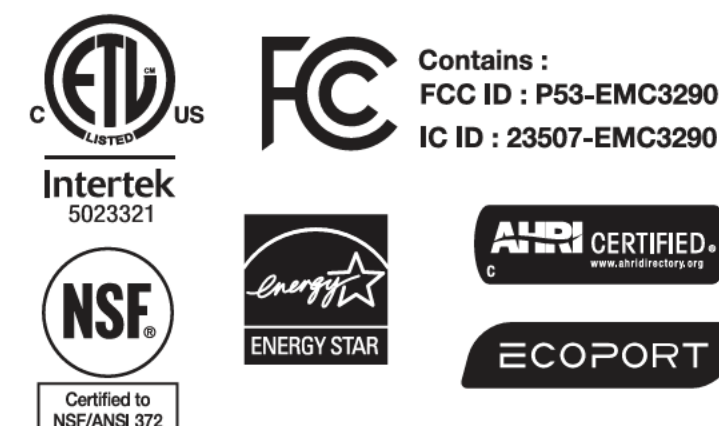

Dimensions

